


STEP #1

BASS DRUM ASSEMBLY

Front of bass drum is determined by forward position of (1) bass drum spur (leg) mounts and (2) tom mount.

When installing front (logo) drum head, center logo between the top two drum lugs.

Remove plastic from bass drum hoop before installing.

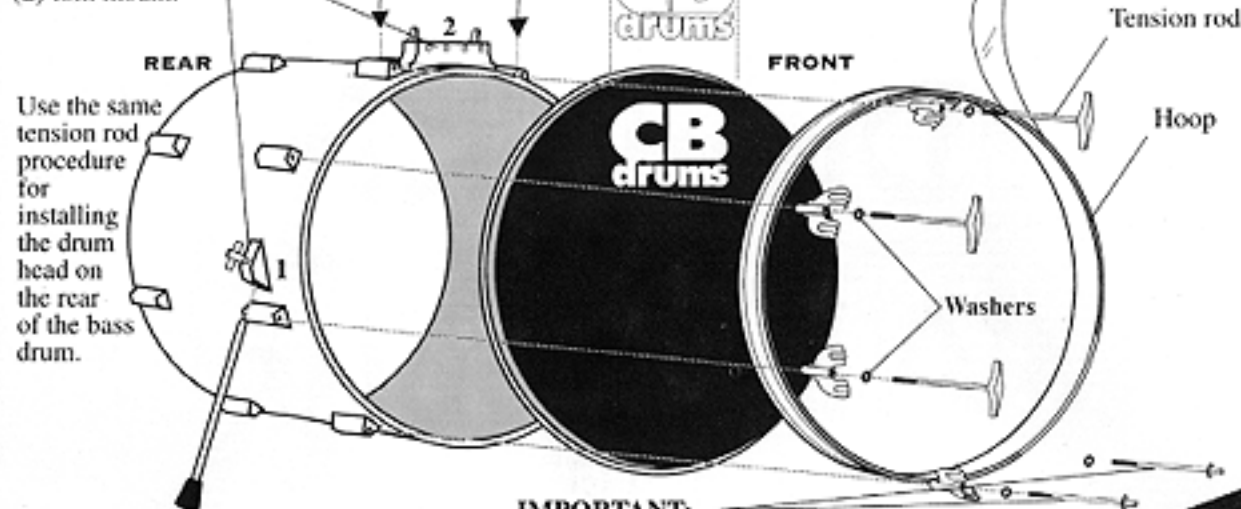

Use the same tension rod procedure for installing the drum head on the rear of the bass drum.

IMPORTANT:

When installing tension rods on the front and back of the bass drum, the two bottom-most rods on both sides are the drum key head tension rods - *not* the wing nut type.


On the rear side of bass drum, attach bass drum pedal to hoop by tightening hoop clamp wing screw securely.

TOM TOM ASSEMBLY

STEP #2

For all tom drums, including floor tom

Follow the procedure shown when installing the drum heads. First finger-tighten all the tension rods. Then with drum key, give each tension rod a few turns until the wrinkles in the head disappear. Then tune top and bottom head close to each other in pitch, but not too tight! The pitch of the tom drums goes from smallest: *highest pitch* down to largest: *lowest pitch*.

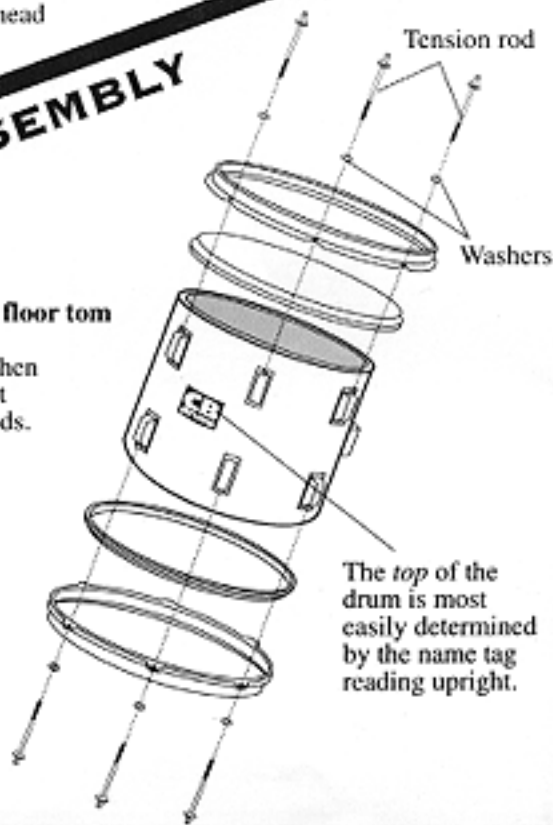

The top of the drum is most easily determined by the name tag reading upright.

